

FuelCAN

Fuel level sender to SAE J1939 transmitter



Features

- Compatible with Murphy ES series and other resistive fuel level senders
- Transmits fuel level data over CANbus SAE J1939 systems
- Compact, sealed epoxy-filled case

FuelCAN is a compact interface that translates an analogue fuel level sender signal into digital SAE J1939 CANbus data. The device allows integration of standard senders into modern J1939/CANbus engine instrument and control systems.


FuelCAN modules have three inputs (only one of which is connected at any one time): input 1 is configured for use with Murphy ES series resistive fuel level senders; inputs 2 and 3 can be used with fuel level senders having compatible resistance ranges as shown right.

FuelCAN inputs can also be factory-configured for use with other types of fuel level or resistive senders. Please note that minimum order quantities apply for custom solutions.

A rear facing LED indicates input/CANbus status. FuelCAN is compact and light enough to be incorporated into wiring harnesses, but can also be surface mounted via four holes. The polycarbonate case is fully sealed in epoxy resin for high impact and environmental resistance.

	fuel level / approx. resistance, Ohms				
	empty	1/4	1/2	3/4	full
Input 1 (Murphy)	240	147	96	60	33.5
Input 2	240	158	100	58	30
Input 3	10	56	95	138	180

Connection & Dimensions

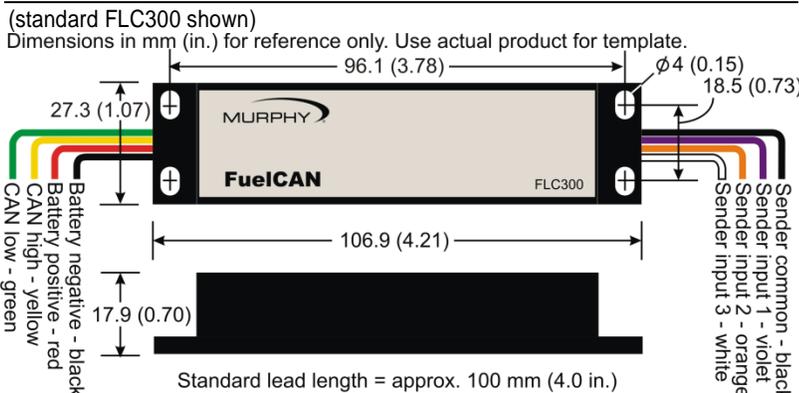

Specifications

Power supply

Operating voltage: 7 to 35 VDC
Current consumption: 25mA (typ.)

Inputs

Maximum operating range: -2 to +35 VDC
Input 1 sender range, Ohms: 240 (empty) to 33.5 (full)
Input 2 sender range, Ohms: 240 (empty) to 30 (full)
Input 3 sender range, Ohms: 10 (empty) to 180 (full)

Outputs

CANbus: SAE J1939 protocol, PGN65276 (00FEFC₁₆),
2 sec update rate, source address: 0xA0
optional 120 Ohm CAN terminating resistor (see How to Order section for part codes).

Physical

Case material: high impact ABS, epoxy filled
Dimensions: see diagram left
Weight: approx 60 g / 0.13 lb
Operating temperature: -20 to +85 °C / -4 to +185 °F
Environmental sealing: IP65 case, exposed lead ends
Electromagnetic compatibility: 2004/108/EC

How to order

part number	model/description
79.70.0085	Std. FLC300 without CAN terminating resistor
79.70.0095	Std. FLC300 with 120 Ohm CAN terminating resistor

To discuss custom FuelCAN or SenderCAN modules, please contact your local Murphy representative.

ENOVATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE, TULSA, OK 74146, USA

ENOVATION CONTROLS - SAN ANTONIO OFFICE
5757 FARINON DRIVE, SAN ANTONIO, TX 78249, USA

ENOVATION CONTROLS - HOUSTON OFFICE
105 RANDON DYER RD, ROSENBERG, TX 77471, USA

ENOVATION CONTROLS LTD. - UNITED KINGDOM
CHURCH ROAD, LAVERSTOCK, SALISBURY, SP1 1GZ, UK

MURPHY ECONTROLS TECHNOLOGIES - CHINA
77 23RD STREET, HANGZHOU ECONOMIC &
TECHNOLOGICAL DEVELOPMENT AREA,
HANGZHOU, ZHEJIANG 310018, CHINA

SALES & SUPPORT, NORTH AMERICA

MURPHY PRODUCTS:
PHONE: 918 317 4100
FAX: 918 317 4266
EMAIL: SALES@FWMURPHY.COM
WWW.FWMURPHY.COM

ECONTROLS PRODUCTS:
PHONE: 210 495 9772
FAX: 210 495 9791
EMAIL: INFO@ECONTROLS.COM
WWW.ECONTROLS.COM

MURPHY CONTROL SYSTEMS & SERVICES
PHONE: 281 633 4500
FAX: 281 633 4588
EMAIL: CSS-SOLUTIONS@FWMURPHY.COM

MURPHY INDUSTRIAL PANEL DIVISION
PHONE: 918 317 4100
FAX: 918 317 4124
EMAIL: IPDSALES@FWMURPHY.COM

SALES & SUPPORT, INTERNATIONAL

EUROPE, MIDDLE EAST & AFRICA
PHONE: +44 1722 410055
FAX: +44 1722 410088
EMAIL: SALES@ENOVATIONCONTROLS.EU
WWW.FWMURPHY.EU

CHINA
PHONE: +86 571 8788 6060
FAX: +86 571 8684 8878
EMAIL: APSALES@FWMURPHY.COM

LATIN AMERICA & CARIBBEAN
PHONE: +1 918 317 2500
EMAIL: LASALES@FWMURPHY.COM

SOUTH KOREA
PHONE: +82 70 7951 4100
EMAIL: SKOREASALES@FWMURPHY.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIASALES@FWMURPHY.COM



FM 28221 (Tulsa, OK - USA)
FM 28221 (Rosenberg, TX - USA)
FM 620667 (San Antonio, TX - USA)
FM 29422 (UK)



FM 523851, TS 589322 (China)