



MURPHY®

by **ENOVATION** CONTROLS

POWerview®
450

RUGGED, RELIABLE, ROBUST MID-RANGE, FULL-COLOR DISPLAY

Rich Feature Set.
Fully Customizable.
Compact Size.

Compact size to fit your application

Bonded LCD for optimum viewability

Streamlined modular design

Easy-to-use configuration software

Data logging

Customizable bezel, buttons,
I/O interface and more



The PowerView 450 is a compact, fully configurable display designed for use in modern electronic engines. It integrates electronic engine, transmission and equipment information into an easy-to-read, full-color interface.


The PV450 features a 4.3-inch screen perfect for applications with tighter spaces, and it delivers the same powerful performance as Murphy's larger configurable displays. In addition, the PV450 display meets the requirements for Tier4/Euro Stage IIIB emissions monitoring from the factory.

Customize the PV450 with Murphy's PowerVision Configuration Studio® software, a powerful tool that allows you to customize the look and feel of equipment screens, customize parameters, edit troubleshooting information, add company branding and more.



THE POWERVIEW® 450

STANDARD DIMENSIONS

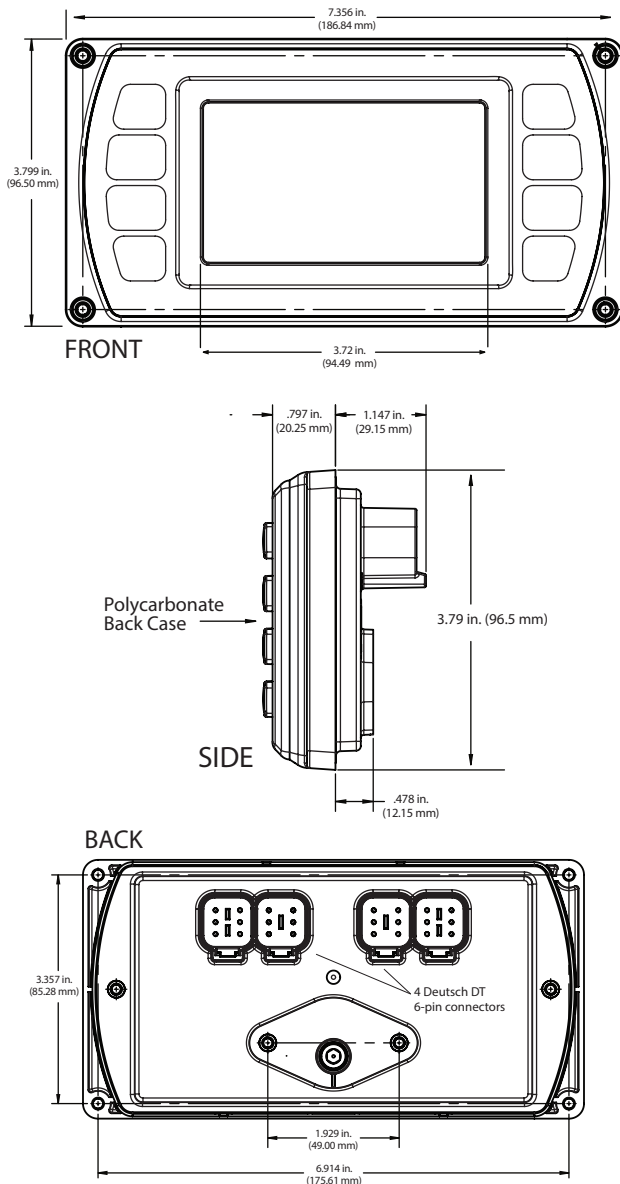

TECHNICAL SPECS:

- Display: Bonded 4.3"/109mm color transmissive TFT LCD
- Resolution: WQVGA, 480 x 272 pixels, 16-bit color
- Aspect Ratio: 16:9
- Orientation: Landscape or portrait
- Backlighting: LED, 500-650 cd/m² (30,000 hr lifetime)
- Microprocessor: Freescale iMX35, 32bit, 532MHz
- QNX Real-Time Operating System
- Flash Memory: 256 MB (expandable to 8GB)
- RAM: 128MB DDR2 SDRAM
- USB 2.0 host (full speed)
- Operating Voltage: 6-32 VDC, reverse polarity and load-dump protected
- Power Consumption: 10W max
- CAN: Two CAN 2.0B; optional NMEA 2000 isolation
- RS 485: 1 MODBUS Master/Slave port, PVA
- Optional video input: Two NTSC/PAL input channels (one displayed at a time)
- Protocols: J1939, NMEA 2000, CANopen, Freeform CAN
- Connection: 4 Deutsch DT 6-pin connectors
- Keyboard: 8 tactile buttons
- Input: 1 Resistive, 0-5V, or 4-20mA (software configurable)
- Output: 1 open-drain, capable of syncing 500mA
- Real-time clock with battery backup

ENVIRONMENTAL

- Operating Temperature: -40°C to 85°C (-40° to 185°F)
- Storage Temperature: -40°C to 85°C (-40° to 185°F)
- Protection: IP 66 and 67, front and back
- Emissions and Immunity:
 - Electromagnetic Compatibility: 2004/108/EC
 - EN 61000-6-4
 - EN 61000-6-2 (immunity)
 - EN 50121-3-2
 - EN 12895
 - J1113/2, 4, 11, 12, 21, 24, 26 and 41
- Vibration: 7.86g random vibe [5-2,000Hz] in 3 axes
- Shock: ±50g in 3 axes

ENOVATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVATION CONTROLS – SAN ANTONIO OFFICE
5757 FARINON DRIVE
SAN ANTONIO, TX 78249

ENOVATION CONTROLS – HOUSTON OFFICE
105 RANDON DYER RD
ROSENBERG, TX 77471

ENOVATION CONTROLS LTD. – UNITED KINGDOM
CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

MURPHY ECONTROLS TECHNOLOGIES (HANGZHOU) CO, LTD.
77 23RD STREET
HANGZHOU ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA
HANGZHOU, ZHEJIANG 310018 CHINA

U.S. SALES & SUPPORT

ECONTROLS PRODUCTS
PHONE: 210 495 9772
FAX: 210 495 9791
EMAIL: INFO@ENOVATIONCONTROLS.COM
WWW.ECONTROLS.COM

MURPHY PRODUCTS
PHONE: 918 317 4100
FAX: 918 317 4266
EMAIL: SALES@ENOVATIONCONTROLS.COM
WWW.FWMURPHY.COM

MURPHY CONTROL SYSTEMS & SERVICES
PHONE: 281 633 4500
FAX: 281 633 4588
EMAIL: CSS-SOLUTIONS@ENOVATIONCONTROLS.COM

MURPHY INDUSTRIAL PANEL DIVISION
PHONE: 918 317 4100
FAX: 918 317 4124
EMAIL: IPDSALES@ENOVATIONCONTROLS.COM

INTERNATIONAL SALES & SUPPORT

UNITED KINGDOM
PHONE: +44 1722 410055
FAX: +44 1722 410088
EMAIL: SALES@ENOVATIONCONTROLS.EU
WWW.FWMURPHY.EU

CHINA
PHONE: +86 21 6237 5885
FAX: +86 21 6237 5887
EMAIL: APSALES@ENOVATIONCONTROLS.COM

LATIN AMERICA & CARIBBEAN
PHONE: 918 317 2500
EMAIL: LASALES@ENOVATIONCONTROLS.COM

SOUTH KOREA
PHONE: +82 70 7951 4100
EMAIL: SKOREASALES@ENOVATIONCONTROLS.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIALES@ENOVATIONCONTROLS.COM



FM 28221 (Tulsa, OK - USA)
FM 620667 (San Antonio, TX - USA)
FM 28221 (Rosenberg, TX - USA)
FM 29422 (UK)



FM 523851 (China) TS 589322 (China)